

AC230 Series

Premium Series Triaxial Accelerometer, Connector/Cable, 100 mV/g

Must Use J4A, J4C, J4N, or J4P Connectors
Must Use CB105, CB117, CB119
or CB218 Cables

Product Features

Premium Triaxial Sensor
Collect 3 Axes of Data


- Premium ±5% Sensitivity
- Reduces Data Collection Time
- 1/4-28 or M6x1 Captive Bolt

Actual Product Size Shown




AC230-1D

4 Pin Connector

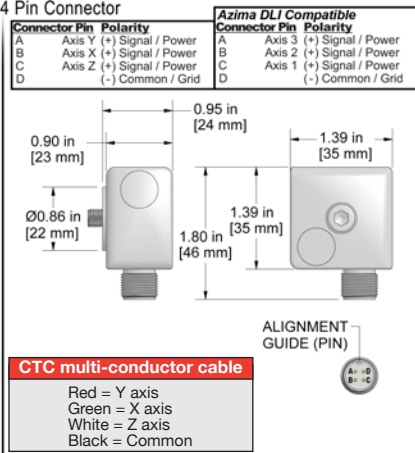


AC230-2D

Integral Cable

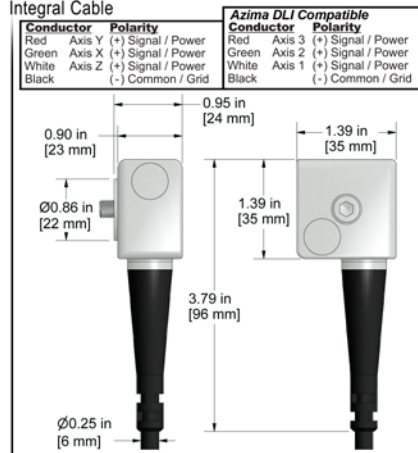

AC230-3D

Armored Integral Cable

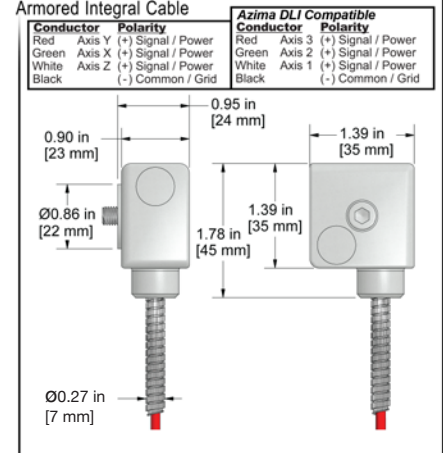

Specifications	Standard	Metric
Part Number	AC230	M/AC230
Sensitivity (±5%)	100 mV/g	
Frequency Response (±3dB)	36-600,000 CPM	0,6-10000 Hz
Frequency Response (±10%)	60-390,000 CPM	1,0-6500 Hz
Frequency Response (±5%)	480-330,000 CPM	8,0-5500 Hz
Dynamic Range	± 50 g, peak	
Electrical		
Settling Time	<2.5 seconds	
Voltage Source (IEPE)	18-30 VDC	
Constant Current Excitation	2-10 mA	
Spectral Noise @ 10 Hz	27 µg/√Hz	
Spectral Noise @ 100 Hz	6.5 µg/√Hz	
Spectral Noise @ 1000 Hz	2.5 µg/√Hz	
Output Impedance	<100 ohm	
Bias Output Voltage	10-14 VDC	
Case Isolation	>10 ⁹ ohm	

Specifications	Standard	Metric
Environmental		
Temperature Range	-65 to 250°F	-54 to 121°C
Electromagnetic Sensitivity	CE	
Sealing	IP68	
Submersible Depth (AC230-2D/3D)	200 ft.	60 m
Physical		
Sensing Element	PZT Ceramic	
Sensing Structure	Shear Mode	
Weight	7.1 oz	200 grams
Case Material	316L Stainless Steel	
Mounting	1/4-28	
Connector (non-integral)	4 Pin	
Mounting Torque	1 to 2 ft. lbs.	1,4 to 2,7 Nm
Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
Calibration Certificate	CA10	

Ordering Information

Standard	AC230-1D (1/4-28 Captive Bolt)	AC230-2D - / (1/4-28 Captive Bolt)	AC230-3D - / (1/4-28 Captive Bolt)
	(length in feet) (termination)	(length in feet) (termination)	(maximum armor length 100 ft.) (cable length in feet) (termination)
Metric	M/AC230-1D (M6x1 Captive Bolt)	M/AC230-2D - / (M6x1 Captive Bolt)	M/AC230-3D - / (M6x1 Captive Bolt)
	(length in meters) (termination)	(length in meters) (termination)	(maximum armor length 30 m) (cable length in meters) (termination)

Cable Termination Options: E3C

F3C

L

Z



VIBRATION ANALYSIS HARDWARE

Backed by our Unconditional Lifetime Warranty