




**Panel Mount Option
(Shown Above)**

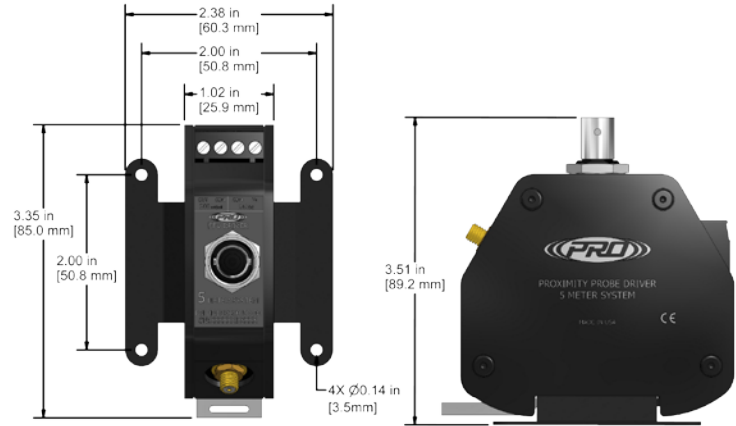

CE Certified

**Panel Mount Option
(Shown Above)**

TERMINAL BLOCK WIRING

Connections	Functions
V _t	-24 VDC
Com	+24 VDC
Com	+24 VDC
V _{out}	-200 mV/mil, DC Gap

Product Features

Driver assembly DD100980 offers multiple options for mounting and easy connections via BNC jack and screw terminals.

- Flexible system configuration
- DC gap and shaft vibration signals available via BNC jack and terminal block for analysis or monitoring
- Multiple mounting options (DIN rail, panel or none)

Specifications

Temperature Range: -49°F (-45°C) to 185°F (85°C)
Linear Range: 10 to 70 mils (.25 - 2.30 mm) @ approximately -1 to -13 VDC
Nominal Voltage Output: -200 mV/mil (-7.87 V/mm)
Input Power/Voltage: -17.5 VDC to -30 VDC
Anodized aluminum enclosure
Miniature 12-32 threaded connector
4 position screw terminals + BNC output

Ordering Information

DD1 **980 -** **00**

Calibrated Material	System Length	Mounting Type	Regulatory Approval
00 = 4140 Steel	5 = 5.0 meter	0 = Panel (Mounting Screws Are Not Included)	00 = CE Certified
10 = 17-4 Stainless Steel	7 = 7.0 meter	1 = DIN	
11 = 420 Stainless Steel		2 = None	
20 = 360 Brass Alloy			
30 = AL7075-T6			



Example Part Number: DD100980-71-00
4140 Steel, 7 meter system length, DIN mount, CE certified



Lifetime Warranty on Materials & Workmanship