


Standard Cable Shown



Armored Cable Shown

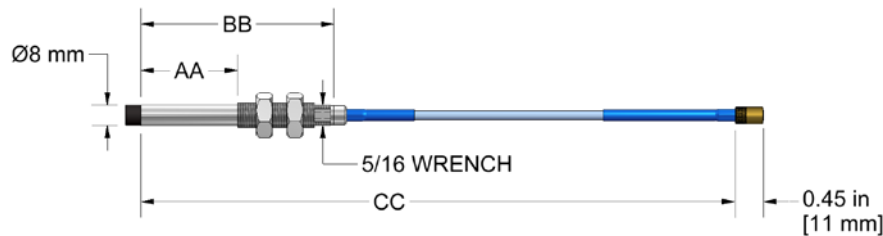

Product Features

Bently™ Compatible DX3301 Series Probes protect fluid bearing machines, such as turbines and compressors. Proprietary design makes our probes compatible with industry standards.

- 8 mm probe tip diameter with 3/8-24 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and jam nuts

Specifications

Temperature Range: - 31°F (-35°C) to 350°F (177°C)
 Sensitivity - 200 mV/mil (8 V/mm) (1 mil = 0.001")
 5/16 in Wrench flats at cable end of probe body
 Miniature 12-32 threaded connector
 Teflon® jacketed cable

Ordering Information

DX3301 - - - - -

Case Thread	No Thread Length	Case Length	Total Length	Connector	Regulatory Approval
01 = 3/8-24 No Armor	00 = 0.0 in 40 = 4.0 in	15 = 1.5 in 60 = 6.0 in	05 = 0.5 meter	01 = mini coax, with connector protector 02 = mini coax	00 = None
02 = 3/8-24 Armor	05 = 0.5 in 50 = 5.0 in	20 = 2.0 in 70 = 7.0 in	10 = 1.0 meter		
	10 = 1.0 in 60 = 6.0 in	30 = 3.0 in 80 = 8.0 in	50 = 5.0 meter		
	20 = 2.0 in 70 = 7.0 in	40 = 4.0 in 95 = 9.5 in	90 = 9.0 meter		
	30 = 3.0 in 80 = 8.0 in	50 = 5.0 in			
	NOTE: 0.5 in. Increments up to 1 in. less than the case length				



Example Part Number: **DX330101-05-15-05-02-00**


No armor, 0.5 inch no thread length, 1.5 inch case length, 0.5 meter total length, mini coax connector



Standard Cable Shown



Armored Cable Shown

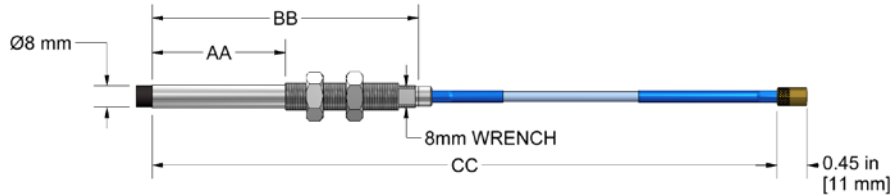

Product Features

Bently™ Compatible DX3301 Series Probes protect fluid bearing machines, such as turbines and compressors. Proprietary design makes our probes compatible with industry standards.

- 8 mm probe tip diameter with M10x1 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body and jam nuts

Specifications

Temperature Range: - 31°F (-35°C) to 350°F (177°C)
Sensitivity - 200 mV/mil (8 V/mm) (1 mil = 0.001")
8 mm Wrench flats at cable end of probe body
Miniature 12-32 threaded connector
Teflon® jacketed cable

Ordering Information

DX3301 - AA - BB - CC - - 00

Case Thread	No Thread Length		Case Length		Total Length	Connector	Regulatory Approval
03 = M10x1 No Armor	00 = 0 mm	08 = 80 mm	03 = 30 mm	12 = 120 mm	05 = 0.5 m	01 = mini coax, with Connector Protector 02 = mini coax	00 = None
	01 = 10 mm	10 = 100 mm	04 = 40 mm	14 = 140 mm	10 = 1.0 m		
	02 = 20 mm	12 = 120 mm	05 = 50 mm	16 = 160 mm	50 = 5.0 m		
04 = M10x1 Armor	03 = 30 mm	14 = 140 mm	06 = 60 mm	18 = 180 mm	90 = 9.0 m		
	04 = 40 mm	16 = 160 mm	07 = 70 mm	20 = 200 mm			
	05 = 50 mm	18 = 180 mm	08 = 80 mm	22 = 220 mm			
	06 = 60 mm	20 = 200 mm	10 = 100 mm	25 = 250 mm			
	07 = 70 mm	22 = 220 mm					
NOTE: 10 mm Increments up to 30 mm less than the case length							

Example Part Number: DX330103-01-10-05-02-00
 No armor, 10 mm no thread length, 100 mm total case length, 0.5 m total length, mini coax connector



Lifetime Warranty on Materials & Workmanship

DX330105 Series

BENTLY™ 3300/3300XL COMPATIBLE Reverse Mount 8 mm Eddy Current/Proximity Probes



Standard Cable Shown



Product Features

Protects fluid bearing machines, such as turbines and compressors. Proprietary design makes our probes compatible with industry standards.

- 8 mm probe tip diameter with 3/8-24 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body

Specifications

Temperature Range: - 31° F (-35° C) to 350° F (177° C)
 Sensitivity - 200 mV/mil (8 V/mm) (1 mil = 0.001")
 7/16 in wrench flats on front of probe
 Miniature 12-32 threaded connector
 Teflon® jacketed cable

Ordering Information

DX3301 0 5 0 2 - 1 2 - CC - 0 2 - 0 0

Case Thread	No Thread Length	Case Length	Total Length	Connector	Regulatory Approval
05 = reverse mount with 3/8-24 threaded body	02 = 0.2 in	12 = 1.2 in	05 = 0.5 meter 10 = 1.0 meter 50 = 5.0 meter 90 = 9.0 meter	02 = mini coax	00 = None

Example Part Number: **DX330105-02-12-05-02-00**

Reverse mount with 3/8-24 threaded body, 0.2 inch no thread length, 1.2 inch case length, 0.5 meter total length, mini coax connector

Lifetime Warranty on Materials & Workmanship


www.ctconline.com




PROTECTION & RELIABILITY
 OPTIMIZATION INSTRUMENTS
 A CTE COMPANY

DX330106 Series

BENTLY™ 3300/3300XL COMPATIBLE Reverse Mount 8 mm Eddy Current/Proximity Probes

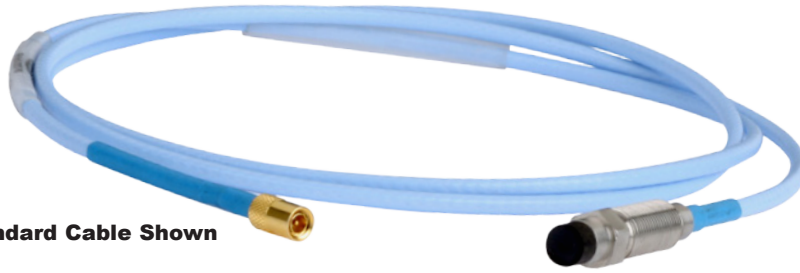

Standard Cable Shown

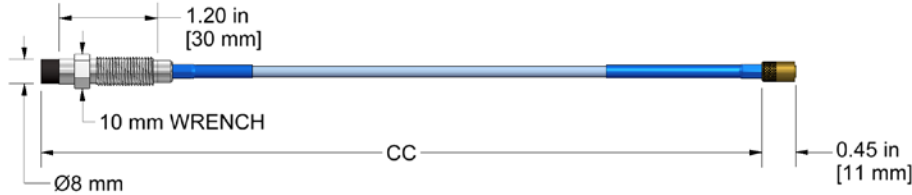

Product Features

Protects fluid bearing machines, such as turbines and compressors. Proprietary design makes our probes compatible with industry standards.

- 8 mm probe tip diameter with M10x1 threaded body
- Probe tip and body sealed to prevent leaking through cable
- Stainless steel probe body

Specifications

Temperature Range: - 31° F (-35° C) to 350° F (177° C)
 Sensitivity - 200 mV/mil (8 V/mm) (1 mil = 0.001")
 10 mm wrench flats on front of probe
 Miniature 12-32 threaded connector
 Teflon® jacketed cable

Ordering Information

DX3301 0 6 0 5 - 3 0 - CC - 0 2 - 0 0

Case Thread	No Thread Length	Case Length	Total Length	Connector	Regulatory Approval
06 = reverse mount with M10x1 threaded body	05 = 5 mm	30 = 30 mm	05 = 0.5 meter 10 = 1.0 meter 50 = 5.0 meter 90 = 9.0 meter	02 = mini coax	00 = None

Example Part Number: **DX330106-05-30-05-02-00**

Reverse mount with M10x1 threaded body, 5 mm no thread length, 30 mm case length, 0.5 meter total length, mini coax connector



Lifetime Warranty on Materials & Workmanship