

MH114-3A



VIBRATION ANALYSIS HARDWARE


Multipurpose 2 Rail Magnet Mounting Base with 1/4-28 Blind Tapped Hole, 50 lbs. Pull Strength, 1.4" (35.56 mm) OD, 0.75" (19.05 mm) Height



Product Features

Durable 303 Stainless Steel case and mounting hole

- ▶ 2 rail mounting system allows measurements on flat and curved surfaces
- ▶ High strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ Magnet Leg Rust Prevention Tips:
 - >Store the product in original packaging until it needs to be installed
 - >Ensure the steel is coated or oiled to prevent rusting

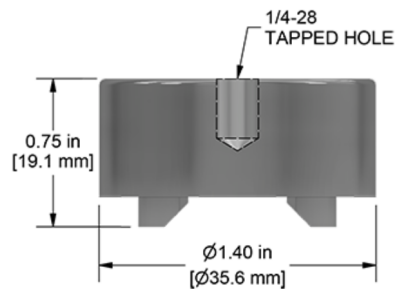

Specifications

Max Temperature	266°F (130°C)
Case Material	303 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.40" (36 mm) OD, .75" (19 mm) Height
Pull Strength	50 lbs. (23 kg)
Sensor Mounting	1/4-28 Mounting Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900