

MEB211 Series

High Frequency, Lightweight Underwater Accelerometer, Top Exit
Moded Integral Cable, 10-32 Mounting, 100 mV/g, ±10%




VIBRATION ANALYSIS HARDWARE




Product Features

- ▶ Nylon Overmolded Accelerometer
- ▶ IP68 Rated
- ▶ High Frequency, 30 kHz Response

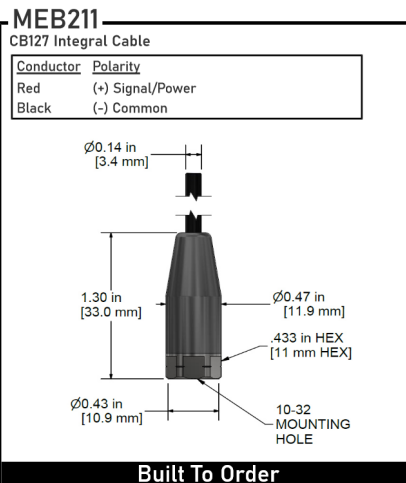

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	MEB211	MEB221	Environmental		
Sensitivity (±10%)	100 mV/g		Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	30-1,800,000 CPM	0.5 Hz-30 kHz	Maximum Shock Protection	10,000 g, peak	
Frequency Response (±10%)	60-900,000 CPM	1 Hz-15 kHz	Electromagnetic Sensitivity	CE Approved	
Frequency Response (±5%)	120-600,000 CPM	2 Hz-10 kHz	Sealing	IP68 Integrally Molded Cable	
Dynamic Range	± 50g, peak		Physical		
Electrical			Sensing Element	PZT Ceramic	
Settling Time	< 2 Seconds		Sensing Structure	Shear Mode	
Voltage Source (IEPE)	18-30 VDC		Weight	0.35 oz	10 grams
Constant Current Excitation	2-10 mA		Mounting Base	316L Stainless Steel	
Spectral Noise @ 10 Hz	30 $\mu\text{g}/\sqrt{\text{Hz}}$		Mounting	10-32 UNF	
Spectral Noise @ 100 Hz	4 $\mu\text{g}/\sqrt{\text{Hz}}$		Cable Jacket Diameter	0.14 in (3.6 mm)	
Spectral Noise @ 1000 Hz	2 $\mu\text{g}/\sqrt{\text{Hz}}$		Cable Jacket Material	Polyurethane	
Output Impedance	< 100 ohm		Cable Conductor	26 AWG Twisted Shielded Pair	
Bias Output Voltage	10-14 VDC		Resonant Frequency	2,640,000 CPM	44 kHz
Case Isolation	>10 ⁸ ohm		Mounting Torque	1.5 - 2.5 ft. lbs (2.0 to 3.4 Nm)	
			Mounting Hardware	10-32 Stud	M5 Stud
			Calibration Certificate	CA10	

Typical Frequency Response

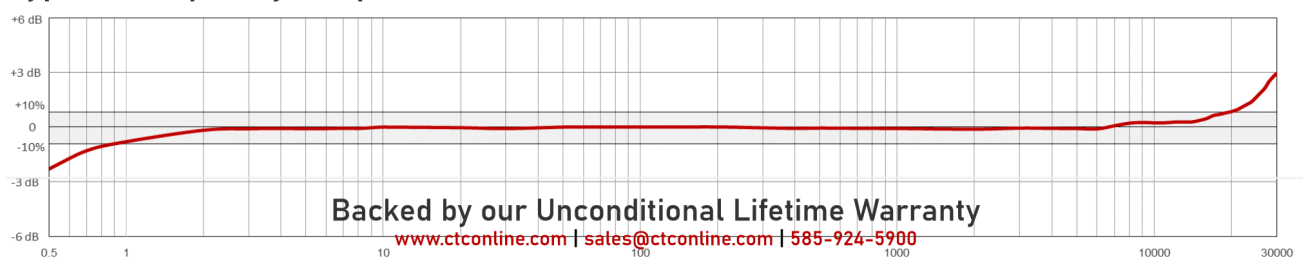

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900