

CT101

Low Cost, Single Axis Cable Termination Box, Polycarbonate Enclosure,
IP64 Rated, Sensor Input Options: 4 Sensor Inputs (4 Measurement Channel
Outputs)




Product Features

Low-Cost Cable Termination Box

Easy access to 1 - 4 channels with attached metal cap covers for superior durability and longevity

- ▶ Connects remotely installed sensors to portable data collectors
- ▶ Optional cord grip provides quick and secure cable entry into enclosure
- ▶ Attached BNC covers keep jacks protected

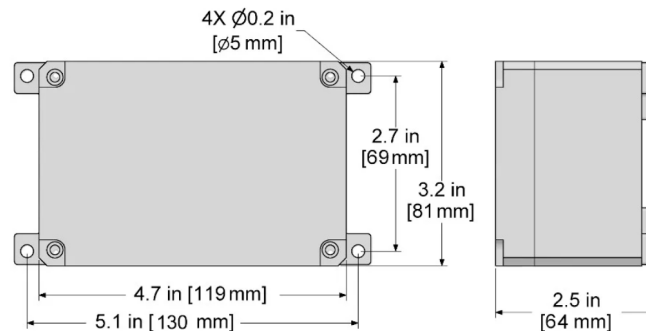

Specifications

Temperature Range	-58 to 180 °F (-50 to 82 °C)
Enclosure Material	Polycarbonate
Inputs	Terminal Block 3 Connections per Channel (+, -, GND)
Outputs	BNC Jack per Channel, Electrically Isolated
Sensor Input Options	1, 2, 3, and 4 Channel Options
Rating	IP64
Door Closure	4 Screws
Dimensions	5.10 x 3.20 x 2.50 in. (130 x 81 x 64 mm)
Cord Grips	Optional
Resistance	Resistant to Hose Directed Fluid

Ordering Information

CT101	☐	-	☐	☐
Enclosure Type Polycarbonate Enclosure	Ground Lug Blank = No Ground Lug G = Ground Lug	Sensor Inputs (Single Output) 1 = 1 Sensor 2 = 2 Sensors 3 = 3 Sensors 4 = 4 Sensors	Input Options A = No Factory Penetrations* B = Conduit Fitting** C = Nylon Cord Grips	
*No punch outs are provided in the enclosure for cable entry. User may install any fitting required **For use with conduit.				