

CT142

Low Cost, Dual Output Cable Termination Box, Polycarbonate Enclosure, IP64 Rated, Sensor Input Options: 2 Dual Output Sensor Inputs (4 Measurement Outputs)




Product Features

Low-Cost Cable Termination Box

Easy access to 1 - 2 channels with attached metal cap covers for superior durability and longevity

- ▶ Connects remotely installed sensors to portable data collectors
- ▶ Optional cord grip provides quick and secure cable entry into enclosure
- ▶ Attached BNC covers keep jacks protected

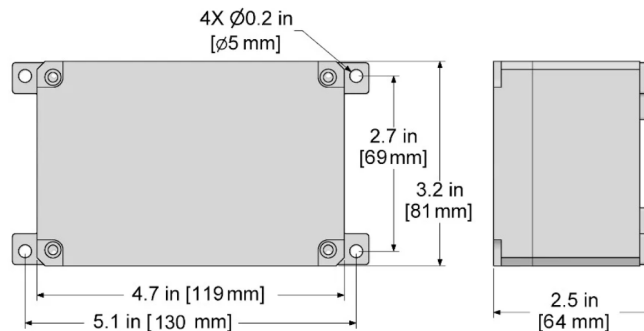

Specifications

Temperature Range	-58 to 180 °F (-50 to 82 °C)
Enclosure Material	Polycarbonate
Inputs	Terminal Block 4 Connections per Channel (A, B, C, GND)
Outputs	2 BNC Jackers per Channel, Electrically Isolated
Sensor Input Options	1 or 2 Channel Options
Rating	IP64
Door Closure	4 Screws
Dimensions	5.10 x 3.20 x 2.50 in. (130 x 81 x 64 mm)
Cord Grips	Optional
Resistance	Resistant to Hose Directed Fluid

Ordering Information

CT142 □ - □ □			
Enclosure Type	Ground Lug	Sensor Inputs (Dual Output)	Input Options
Polycarbonate Enclosure	Blank = No Ground Lug G = Ground Lug	1 = 1 Sensor 2 = 2 Sensors	A = No Factory Penetrations* B = Conduit Fitting** C = Nylon Cord Grips
*No punch outs are provided in the enclosure for cable entry. User may install any fitting required **For use with conduit.			