

MH114-3A

Multipurpose 2 Rail Magnet Mounting Base with 1/4-28 Blind Tapped Hole,
50 lbs. (23 kg) Pull Strength, 1.4 in. (35.56 mm) OD, 0.75 in. (19.05 mm)
Height




VIBRATION ANALYSIS HARDWARE



Product Features

Durable 303 Stainless Steel case and mounting hole

- ▶ 2 rail mounting system allows measurements on flat and curved surfaces
- ▶ High strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ Magnet Leg Rust Prevention Tips:
 - >Store the product in original packaging until it needs to be installed
 - >Ensure the steel is coated or oiled to prevent rusting

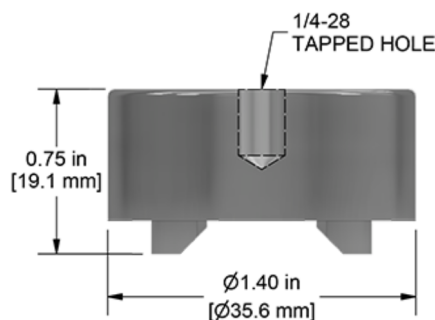

Specifications

Max Temperature	266 °F (130 °C)
Case Material	303 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	1.40 in. (36 mm) OD, 0.75 in. (19 mm) Height
Pull Strength	50 lbs. (23 kg)
Sensor Mounting	1/4-28 Mounting Hole

Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

Stock Product