


# MH123-1A

Flat Surface Magnet Mounting Base with 1/4-28 Threaded Mounting Hole, 60 lbs. (27 kg) Pull Strength, 1.25 in. (31.75 mm) OD, 0.68 in. (17.27 mm) Height



## Product Features

- ▶ Durable 17-4 Stainless Steel case
- ▶ High Strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ Maximum frequency response up to 10 kHz when paired with MH133-1A mounting target

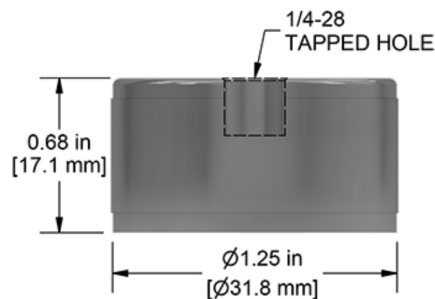

## Specifications

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Max Temperature | 266 °F (130 °C)                                       |
| Case Material   | 17-4 Stainless Steel                                  |
| Magnet Material | Neodymium Iron Boron                                  |
| Dimensions      | 1.25 in. (31.75 mm) OD,<br>0.68 in. (17.27 mm) Height |
| Pull Strength   | 60 lbs. (27 kg)                                       |
| Sensor Mounting | 1/4-28 Mounting Hole                                  |

## Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

## Compatibility

- ▶ Compatible with all sensors with 1/4"-28 mounting stud or bolt
- ▶ Conversion mounting studs sold separately

## Stock Product