

MX502

Single Axis Mini-MAXX Box, Enclosed Individual BNC Connectors,
Aluminum Enclosure, NEMA 4X (IP66) Rated, Sensor Input Options: 1 to 4
Single Output Sensors




Product Features

Provides a low cost solution that is ideal for harsh environments, including cooling towers and other wet or dusty environments

Internally earth grounded for noise reduction

- ▶ 316L stainless steel latch and mounting feet
- ▶ Terminal strip located behind BNC panel for easy wiring with grounding
- ▶ Not recommended for airborne or direct exposure to salt water

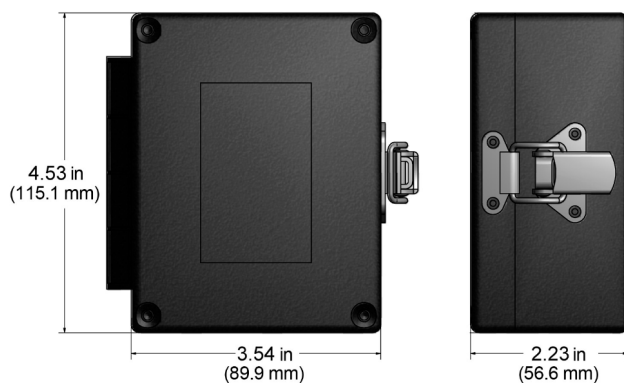

Specifications

Temperature Range	-58 to 180 °F (-50 to 82 °C)
Enclosure Material	Powder Coated Aluminum
Inputs	Conduit or Cord Grips
Outputs	BNC Jack per Channel, Electrically Isolated
Sensor Input Options	1, 2, 3, and 4 Channel Options
Rating	NEMA 4X
Door Closure	Flip Latch
Dimensions	3.54 x 4.53 x 2.23 in. (90 x 115 x 57 mm)
Cord Grips	Optional
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

MX		-		
	Enclosure Type 502 = Aluminum Enclosure 702 = Fiberglass Enclosure		Sensor Inputs (Single Output) 1 = 1 Sensors 2 = 2 Sensors 3 = 3 Sensors 4 = 4 Sensors	Input Options A = No Factory Penetrations* B = Conduit Fitting** C = Nylon Cord Grips N = Nickel Plated Brass Cord Grips† S = Stainless Steel Cord Grips†
*No punch outs are provided in the enclosure for cable entry. User may install any fitting required. **For use with conduit. †Aluminum enclosures only				