

MX742

Dual Input & Output Mini-MAXX Box, Polycarbonate Enclosure, NEMA 4X (IP66) Rated, Sensor Input Options: 1 or 2 Dual Output Sensors



VIBRATION ANALYSIS HARDWARE




Product Features

Provides a low-cost solution that is ideal for harsh environments, including coastal areas exposed to salt air

Internally earth grounded for noise reduction

- ▶ 316 stainless steel latch and mounting feet resist corrosion in harsh environments
- ▶ Terminal strip located behind BNC panel for easy wiring with grounding

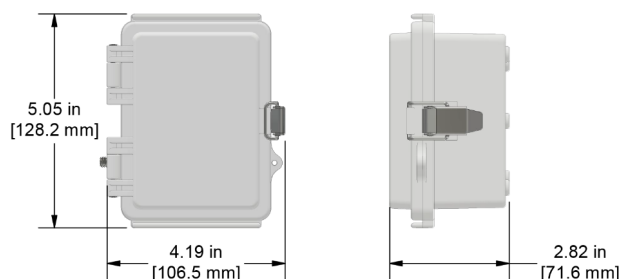

Specifications

Temperature Range	-58 °F (-50 °C) to 180 °F (82 °C)
Enclosure Material	Polycarbonate
Inputs	Terminal Block
Outputs	4 Inputs per Channel (A, B, C, GND)
Sensor Input Options	2 BNC Jacks per Channel, Electrically Isolated
Rating	1, 2 Channel Options
Door Closure	NEMA 4X (IP66)
Dimensions	Flip Latch
Cord Grips	5.05 x 4.19 x 2.82 in. (128.2 x 106.5 x 71.6 mm)
Resistance	Optional
	Resistant to Hose-Directed Fluid and Corrosion

Ordering Information

MX			-		
Enclosure Type		Sensor Inputs (Dual Output)		Input Options	
542 = Aluminum Enclosure 742 = Fiberglass Enclosure		1 = 1 Sensors 2 = 2 Sensors		A = No Factory Penetrations* B = Conduit Fitting** C = Nylon Cord Grips N = Nickel Plated Brass Cord Grips† S = Stainless Steel Cord Grips†	
*No punch outs are provided in the enclosure for cable entry. User may install any fitting required. **For use with conduit. †Aluminum enclosures only					