

AC292-M12A Series

Premium, Compact Accelerometer, 4 Pin M12 Connector, 100 mV/g, $\pm 5\%$



VIBRATION ANALYSIS HARDWARE



Product Features


Superior RF Immunity in a Compact 100 mV/g Sensor
Improved Linearity

- ▶ ± 80 g, Dynamic Range
- ▶ 4 Pin M12 Connector

AC292-M12A

4 Pin Connector


Connector Pin	Polarity
1	(+) Signal/Power
2	(-) Common
3	Not Used
4	Not Used



Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC292-M12A	M/ or M8/AC292-M12A	Environmental		
Sensitivity ($\pm 5\%$)	100 mV/g		Operating Temperature Range	-58 to 250 °F	-50 to 121 °C
Frequency Response (± 3 dB)	18-900,000 CPM	0,3-15000 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response ($\pm 10\%$)	60-600,000 CPM	1,0-10000 Hz	Electromagnetic Sensitivity	CE	
Frequency Response ($\pm 5\%$)	600-240,000 CPM	10-4000 Hz	Sealing	Welded, Hermetic	
Dynamic Range	± 80 g, peak *Vsource ≥ 22 V, 12Vbias		Submersible Depth	200 ft.	60 m
Transverse Sensitivity	$\leq 5\%$		Physical		
Electrical			Sensing Element	PZT Ceramic	
Settling Time	<2 Seconds		Sensing Structure	Shear Mode	
Voltage Source	18-30 VDC		Weight	1.8 oz	51 grams
Constant Current Excitation	2-10 mA		Case Material	316L Stainless Steel	
Spectral Noise @ 10 Hz	8 μ g/ $\sqrt{\text{Hz}}$		Mounting Thread	1/4-28 Blind Tapped Hole	
Spectral Noise @ 100 Hz	4 μ g/ $\sqrt{\text{Hz}}$		Connector (Non-Integral)	4 Pin M12	
Spectral Noise @ 1000 Hz	2 μ g/ $\sqrt{\text{Hz}}$		Resonant Frequency	1,560,000 CPM	26000 Hz
Output Impedance	<100 ohm		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
Bias Output Voltage	10-14 VDC		Mounting Hardware Supplied	1/4-28 Stud	M6x1 or M8x1.25 Adapter Stud
Case Isolation	>10 ⁸ ohm		Calibration Certificate	CA10	

Typical Frequency Response

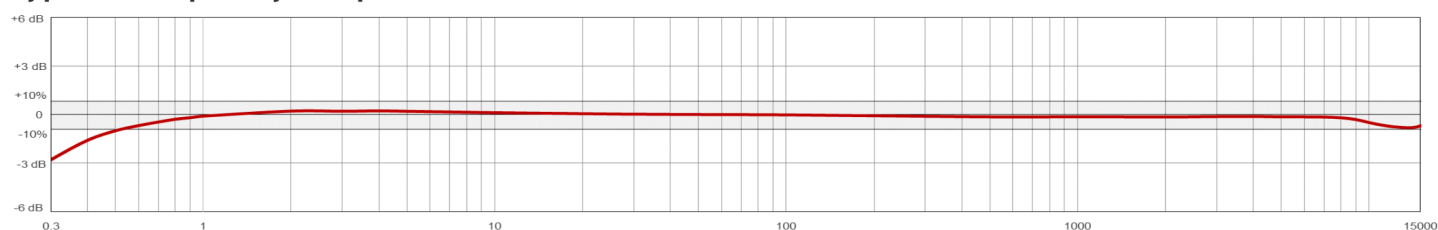

www.ctconline.com | sales@ctconline.com | 585-924-5900