

MX202

Single Axis MAXX Box, Enclosed Individual BNC Connectors, Stainless Steel Enclosure, NEMA 4X (IP66) Rated, Sensor Input Options: 1 to 12 Single Output Sensors




Product Features

Connects remotely installed sensors to portable data collectors

Internally earth grounded for noise reduction

- ▶ Up to 12 BNC outputs are mounted in one, safe and convenient location for quick access
- ▶ Withstands harsh factory and outdoor environments
- ▶ Quick-release input terminal blocks

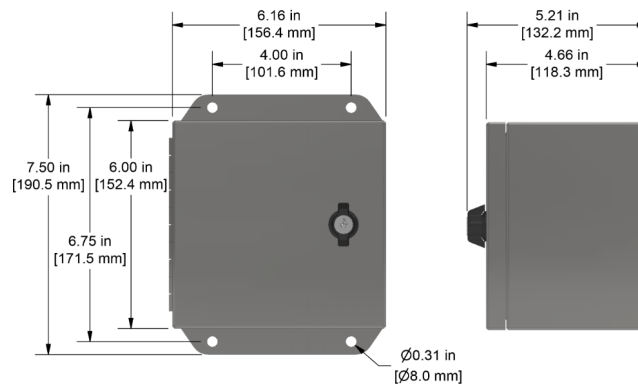

Specifications

Temperature Range	-58 to 180 °F (-50 to 82 °C)
Enclosure Material	Stainless Steel
Inputs	Terminal Block 3 Inputs per Channel (+, -, Shield)
Outputs	BNC Jack per Channel, Electrically Isolated
Sensor Input Options	1 - 12 Channel Options
Rating	NEMA 4X (IP66)
Door Closure	Twist Latch
Dimensions	6.16 x 7.50 x 5.21 in. (156 x 191 x 132 mm)
Cord Grips	Optional
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

MX		-			
					
Enclosure Type		Sensor Inputs (Single Output)		Input Options (Spring Cage Terminal Blocks)	
102 = Fiberglass Enclosure		1 = 1 Sensors 7 = 7 Sensors		A = No Factory Penetrations*	
202 = Stainless Steel Enclosure		2 = 2 Sensors 8 = 8 Sensors		B = Conduit Fitting**	
262 = Stainless Steel Enclosure, Sloped Top		3 = 3 Sensors 9 = 9 Sensors		C = Nylon Cord Grips	
		4 = 4 Sensors 10 = 10 Sensors		N = Nickel Plated Brass Cord Grips†	
		5 = 5 Sensors 11 = 11 Sensors		S = Stainless Steel Cord Grips†	
		6 = 6 Sensors 12 = 12 Sensors		G = No Factory Penetrations*	
				H = Conduit Fitting**	
				I = Nylon Cord Grips	
				L = Nickel Plated Brass Cord Grips†	
				K = Stainless Steel Cord Grips†	
*No punch outs are provided in the enclosure for cable entry. User may install any fitting required **For use with conduit. †Stainless Steel enclosures only					